


NU-751M

Remote-Sensor Thermometer

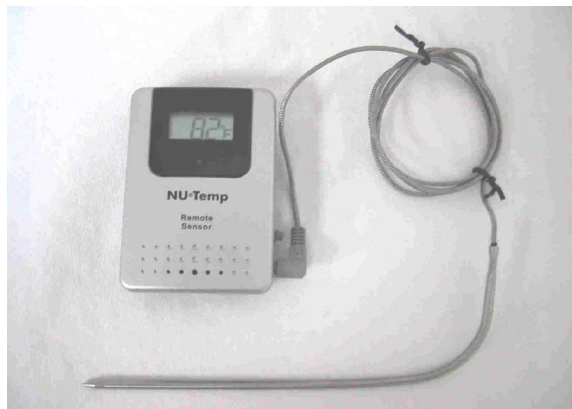

Setup:

Remove the stand clip from the four corners on the back of the unit.

Insert 3 AAA Alkaline or Lithium batteries in the remote sensor by removing the four screws on back of unit.

LCD Display will show all segments for 3 seconds

Attach sensor if required for application

Sensor will automatically link

Press the C/F button to toggle between Centigrade and Fahrenheit

Specifications:

Temperature Range: -40° to 392°F

LLL indicates temperature below monitoring range

HHH indicates temperature above monitoring range

Display resolution of one degree C/F

Battery Life:

6 months depending on use. Low Battery indicator: A low battery icon will be shown if the batteries are getting low. Caution: Do not mix alkaline with Cadmium or Lithium Batteries.

NUoTemp

Pal Products, Inc.

P.O. Box 905, Wisconsin Rapids, WI 54495

Phone: (715) 421-0445 Fax: (715) 422-6849

www.nu-temp.com information@nu-temp.com